


1 LASK TIL 35 KG/JBV40 - FL.35	2
2 LASKER TIL S41/S49/S54 - SKINNE	3
3 LASK TIL UIC54/UIC54E - TYPE B.....	4
4 LASK TIL UIC60 - FL.31	5

1 LASK TIL 35 KG/JBV40 - FL.35

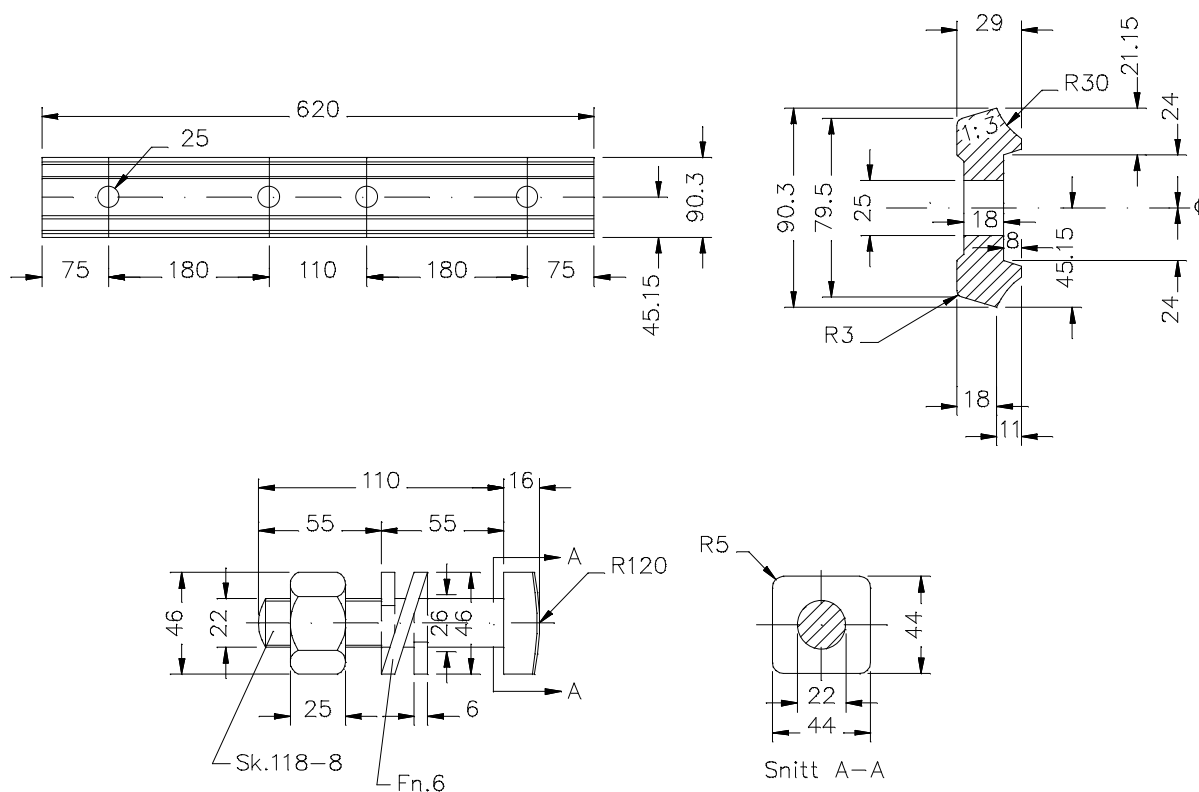


Tabell 9.a.1 Lasker til 35 kg/JBV40, geometriske data

Tverrsnitt, F	$2 \times 17,83 = 35,7 \text{ cm}^2$
Tregghetsmoment om X - aksen, I_{x-x}	$2 \times 117 = 234 \text{ cm}^4$
Motstandsmoment om X - aksen, W_{y-y}	$2 \times 26 = 52 \text{ cm}^3$

Tabell 9.a.2 Materialbehov for 1 lasket skjØt 35kg/JBV40

Deler	Betegnelse	F.nr.
Flatlasker, 2 stk.	Fl. 35	102.035.01
Laskebolter, 4 stk.	22 x 110	102.135.01
Fjærringer, 4 stk.	Fn 6	102.301.02


3 LASK TIL UIC54/UIC54E - TYPE B

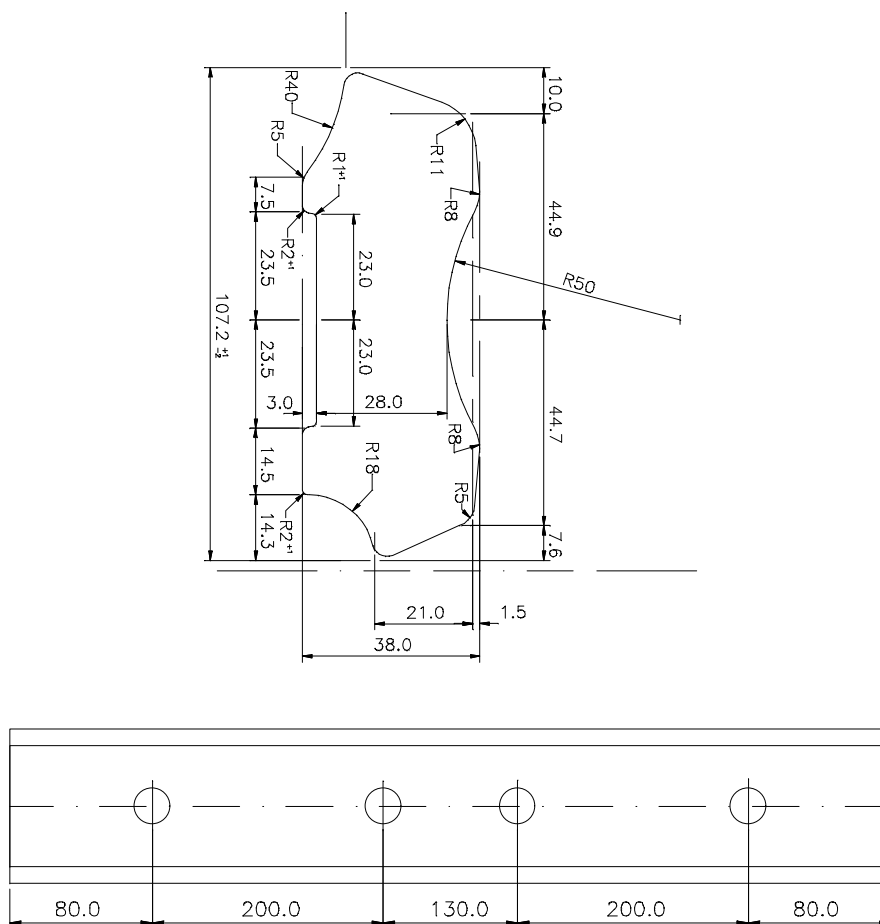

Tabell 9.a.5 Materialbehov for 1 lasket skjøl UIC54/UIC54E

Deler	Betegnelse	F.nr.
Flatlasker, 2 stk.	type B	102.049.41
Laskebolter, 4 stk.	M24 - 135	102.149.01
Fjærringer, 4 stk.	Fn 6	102.302.02

4 LASK TIL UIC60 - FL.31

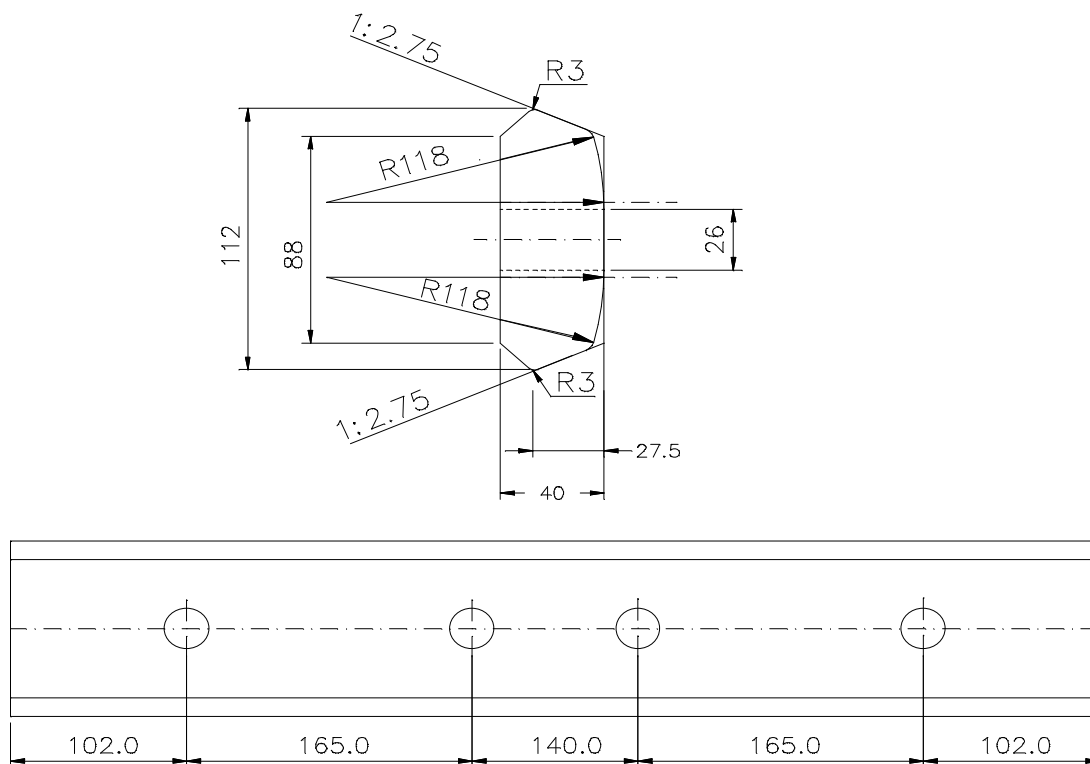

Tabell 9.a.6 Materialbehov for 1 lasket skjøt UIC60

Deler	Betegnelse	F.nr.
Flatlasker, 2 stk.	Fl. 31	102.049.42
Laskebolter, 4 stk.	M24 - 135	102.149.01
Fjærringer, 4 stk.	Fn 6	102.302.02